



Type G32 Standard Flange Sleeve

Spacer/Dimensions — Millimeters

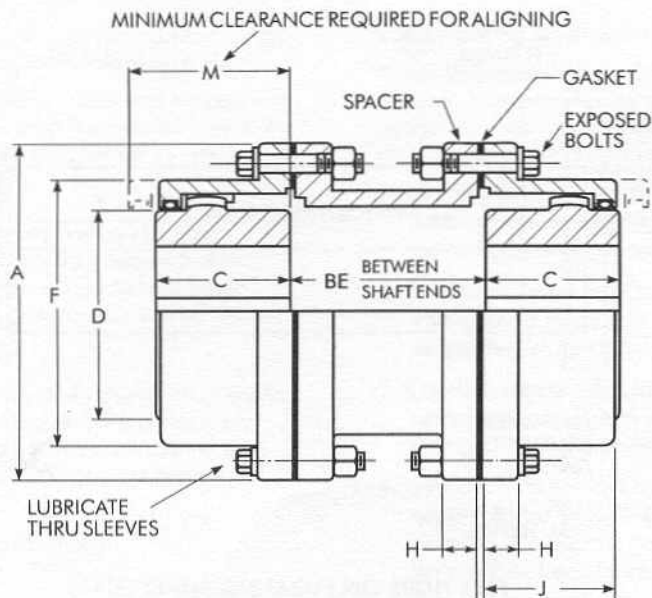

Type G31 shrouded Bolts furnished only when specified on order.

SIZE *	Torque Rating Nm †	Allow. Speed rpm †	Max Bore mm •	Max Bore Inch •	Coupling Wt — kg.		Lube Wt — kg		DIMENSIONS — Millimeters								
					Coupling Wt With No Bore and Min BE	Extra Spacer Wt per mm of Length	Min Wt Less Spacer	Plus per mm of Spacer Length	A	BE		C	D	F	H	J	M
										Min	Max						
1010G	854	7000	50	1.875	6,80	0,0120	0,0408	115,9	82	311	42,9	68,6	83,8	14,0	38,9	48
1015G	1 920	5500	65	2.375	13,6	0,0127	0,0726	152,4	82	311	49,3	86,4	105,2	19,0	47,8	56
1020G	3 560	4600	78	2.875	20,4	0,0166	0,113	0,000536	177,8	82	311	62,0	105,2	126,5	19,0	59,4	69
1025G	6 410	4000	98	3.625	38,6	0,0205	0,227	0,00107	212,7	95	311	77,0	130,6	154,9	21,8	71,6	81
1030G	10 700	3600	111	4.125	54,4	0,0236	0,363	0,00107	239,7	95	311	91,2	152,4	180,3	21,8	83,8	94
1035G	16 400	3100	134	4.875	88,5	0,0359	0,544	0,00214	279,4	120	311	106,4	177,8	211,3	28,4	97,5	107
1040G	24 900	2800	160	5.750	122,5	0,0500	0,907	0,00357	317,5	120	311	120,6	209,6	245,4	28,4	111,3	122
1045G	34 200	2600	183	6.750	166	0,0736	1,04	0,00357	346,1	120	311	134,9	235,0	274,1	28,4	122,9	135
1050G	46 300	2400	200	7.375	238	0,0814	1,77	0,00357	388,9	146	311	153,2	254,0	305,8	38,1	140,7	152
1055G	60 500	2200	220	8.250	306	0,0895	2,22	0,00357	425,4	146	311	168,1	279,4	334,3	38,1	158,0	173
1060G	78 300	2100	244	9.125	358	0,117	3,18	0,00357	457,2	146	311	188,2	304,8	366,0	25,4	169,2	183
1070G	114 000	1800	289	10.875	562	0,141	4,35	0,00357	527,0	146	311	220,7	355,6	424,9	28,4	195,6	208

* Refer to Page 3 for General Information and Reference Notes.

TABLE 6 — Type G32 Standard Stock Spacer Lengths

Distance Between Shaft Ends		Pump Std	COUPLING SIZE					
Millimeter	Inch		1010	1015	1020	1025	1030	1035
89	3.500	ANSI	X	X				
111	4.375	ANSI	X		X			
114	4.500	MISC						X
127	5.000	ANSI	X	X	X	X	X	
178	7.000	ANSI			X	X	X	

■ Bolt holes staggered for assembly clearance.



EQUIPAMENTOS LTDA.

Rua Ernesto da Fontoura, 1393 - Lj. 1
 CEP 90230-091 - Porto Alegre - RS
 Tel/Fax: (51) 3325.2533 - 3342.8735
 e-mail: ameridrive@terra.com.br

ACOPLAMENTOS - REDUTORES - MANCAIS - CONTRA RECUOS